

NS POWERBOX®

Equipped with maintenance free sealed lead acid batteries

**NSP EMERGENCY POWERBOX® FOR
SURGICAL, LIFTS & ELEVATOR, EMERGENCY
LIGHTING SYSTEMS AND VENTILATION
BACK UP POWER SUPPLY.**

**Model: EBOPS 24 150 (150VA)
EBOPS 24 300 (300VA)
EBOPS 36 1000 (1000VA)**




SPECIFICATIONS

- Pure Sine Wave output.
- Dynamic power surge for inductive load.
- Long back up time 1 ~ 3 hours upon mains failure.
- Compact size designed for easy installation and wall mounting.
- Input Voltage $230V \pm 15\%$, Single Phase, 50HZ.
- Output Voltage $230V \pm 3\%$, Single Phase, 50HZ.
- 85% System efficiency.
- Up-graded battery charger for short recharge time.
- Standard equipped with NSB Sealed Lead Acid Batteries.
- May operate with NS RELIANCE Sealed Nickel Metal Hydride batteries ~ Option.
- Temperature Range $0 \sim 40^{\circ}\text{C}$.
- Relative Humidity $0 \sim 90\%$.

* Specification subject to change without prior notice for product improvement.

MODEL	EBOPS 24 150	EBOPS 24 300	EBOPS 36 1000
Output	150 VA	300 VA	1000 VA
Battery Capacity	24 V 17AH	24 V 33AH	36 V 40AH
Back Up Time Full Load	2.5 Hours	2.4 Hours	1.0 Hours
Height	485mm	785mm	680mm
Width	430mm	450mm	650mm
Depth	108mm	150mm	210mm
Weight	24 KGS	38 KGS	72 KGS

Distributed by :



nonstop power sdn bhd (822490-P)

no, 25 jalan usahawan 2/1, taman perdagangan elmina, 47000 sungai buloh, selangor darul ehsan malaysia.

tel +(60)3 - 6039 8899 fax +(60)3 - 6193 0485 email sales@nonstoppower.com website www.nonstoppower.com

NS POWERBELL®

Equipped with digital weekly programmable bell controller & back up batteries

**NS POWERBELL® DESIGNED FOR MODERN
SCHOOL BELL AUTOMATION**

Model: NSP-APT9S


SPECIFICATIONS

- Weekly digital setting with LCD display.
- Support 160 sets of ON/OFF operations.
- High precision timer of ± 15 seconds per month.
- Holiday suspension mode.
- Equipped with manual emergency Push Button.
- Operate with 203mm diameters grey gong bell with sound level at 3 metre 85 dB.
- 24 hours back up time with two units NSB1272 (12V 7.2 A.H) SLA Batteries.
- High Quality constant voltage current limiting charger ensured long battery lifespan.
- Input supply 170 ~ 264VAC, 50HZ, single phase.
- Electro-galvanised steel sheet with epoxy powder coating. IP20 Protection.
- Power consumption less than 8 VA.
- Operating temperature, t_a 0°C to 50°C.
- Weight about 9.7 Kgs with battery.

** Specification subject to change without prior notice for product improvement.*



Distributed by :



nonstop power sdn bhd (822490-P)

no, 25 jalan usahawan 2/1, taman perdagangan elmina, 47000 sungai buloh, selangor darul ehsan malaysia.

tel +(60)3 - 6039 8899 fax +(60)3 - 6193 0485 email sales@nonstoppower.com website www.nonstoppower.com

NS POWERPACK[®] Environmental Friendly

Equipped with maintenance free, high performance NI-MH batteries


NSP EMERGENCY POWERPACK FOR 18W~65W FLUORESCENT FITTINGS.

Model: ■ PP20WF ■ PP40WF
■ PP20WF-E ■ PP40WF-E


SPECIFICATIONS

- Maintained / Non-maintained mode of operation.
- Input supply 240VAC \pm 10%, 50HZ, 1 phase.
- Suitable to operate with 18W ~ 65W fluorescent lamps with conventional or electronic ballast.
- Standard equipped with environmental friendly nickel metal hydride batteries.
- Compact size, easy to install, designed for single core cable connection.
- Solid stage constant current charger.
- Low voltage cut off to prevent battery over discharge.
- Back up time 3 hours after 24 hours charging.
- Red LED indicate main supply and charger healthy.
- High reflectance electro-galvanised steel with epoxy powder coated finishing.
- Power consumption less than 6 VA.
- Operating temperature, t_a 0°C to 65°C.

* Specification subject to change without prior notice for product improvement.

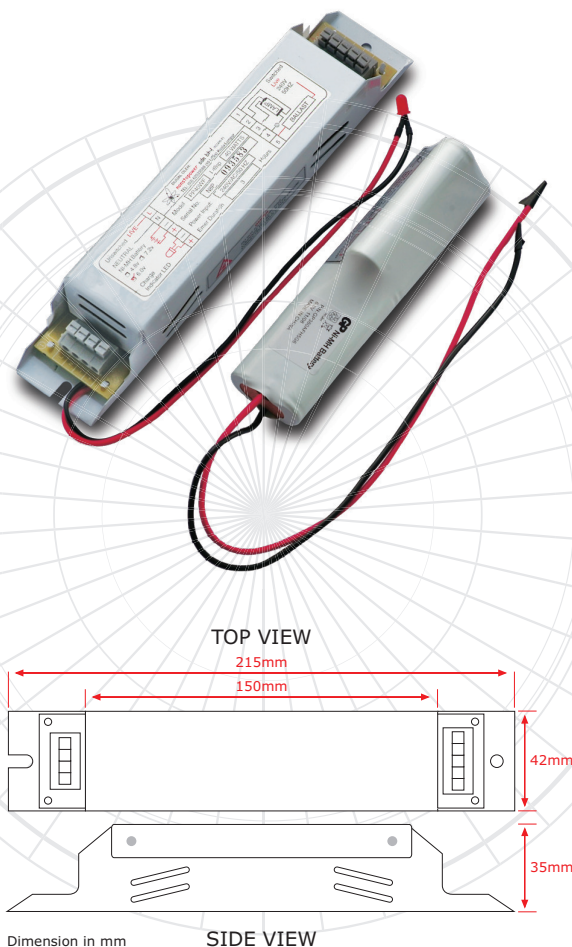

Distributed by :



nonstop power sdn bhd (822490-P)

no, 25 jalan usahawan 2/1, taman perdagangan elmina, 47000 sungai buloh, selangor darul ehsan malaysia.

tel +(60)3 - 6039 8899 fax +(60)3 - 6193 0485 email sales@nonstoppower.com website www.nonstoppower.com